

**华工法兰有限公司**  
HUAGONG FLANGE CO., LTD.



扫码咨询



企业官网

地址：浙江省温州市龙湾区永兴街道滨海园区三道三路593号

手机：15868558788 13758706941 13957758975

电话：0577-8685 8155

传真：0577-8685 1955

邮箱：165683284@qq.com

网址：www.huagongflange.com

Address: No. 593, 3rd Road, 3rd Road, Binhai Park, Yongxing Street,

Longwan District, Wenzhou City, Zhejiang Province

Mobile: 15868558788 13758706941 13957758975

Tel: 0577-8685 8155


Fax: 0577-8685 1955

E-mail: 165683284@qq.com

Web: www.huagongflange.com

甲型平焊法兰尺寸(NB/T 47021-2000) Dimension of flange a flat welding (mm)

公称直径 DN	法兰尺寸							螺柱	
	D	D1	D2	D3	D4	δ	d	规格	数量
<b>PN=0.25MPa</b>									
700	815	780	750	740	737	36	18	M16	28
800	915	880	850	840	837	36	18	M16	32
900	1015	980	950	940	937	40	18	M16	36
1000	1130	1090	1055	1045	1042	40	23	M20	32
1100	1230	1190	1155	1141	1138	40	23	M20	32
1200	1330	1290	1255	1241	1238	44	23	M20	36
1300	1430	1390	1355	1341	1338	46	23	M20	40
1400	1530	1490	1455	1441	1438	46	23	M20	40
1500	1630	1590	1555	1541	1538	48	23	M20	44
1600	1730	1690	1655	1641	1638	50	23	M20	48
1700	1830	1790	1755	1741	1738	52	23	M20	52
1800	1930	1890	1855	1841	1838	56	23	M20	52
1900	2030	1990	1955	1941	1938	56	23	M20	56
2000	2130	2090	2055	2041	2038	60	23	M20	60
<b>PN=0.6MPa</b>									
450	565	530	500	490	487	30	18	M16	20
500	615	580	550	540	537	30	18	M16	20
550	665	630	600	590	587	32	18	M16	24
600	715	680	650	640	637	32	18	M16	24
650	765	730	700	690	687	36	18	M16	28
700	830	790	755	745	742	36	23	M20	24
800	930	890	855	845	842	40	23	M20	24
900	1030	990	955	945	942	44	23	M20	32
1000	1130	1090	1055	1045	1042	48	23	M20	36
1100	1230	1190	1155	1141	1138	55	23	M20	44
1200	1330	1290	1255	1241	1238	60	23	M20	52
<b>PN=1.0MPa</b>									
300	415	380	350	340	337	26	18	M16	16
350	465	430	400	390	387	26	18	M16	16
400	515	480	450	440	437	30	18	M16	20
450	565	530	500	490	487	34	18	M16	24
500	630	590	555	545	542	34	23	M20	20
550	680	640	605	595	592	38	23	M20	24
600	730	690	655	645	642	40	23	M20	24
650	780	740	705	695	692	44	23	M20	28
700	830	790	755	745	742	46	23	M20	32
800	930	890	855	845	842	54	23	M20	40
900	1030	990	955	945	942	60	23	M20	48
<b>PN=1.6MPa</b>									
300	430	390	355	345	342	30	23	M20	16
350	480	440	405	395	392	32	23	M20	16
400	530	490	455	445	442	36	23	M20	20
450	580	540	505	495	492	40	23	M20	24
500	630	590	555	545	542	44	23	M20	28
550	680	640	605	595	592	50	23	M20	36
600	730	690	655	645	642	54	23	M20	40
650	780	740	705	695	692	58	23	M20	44

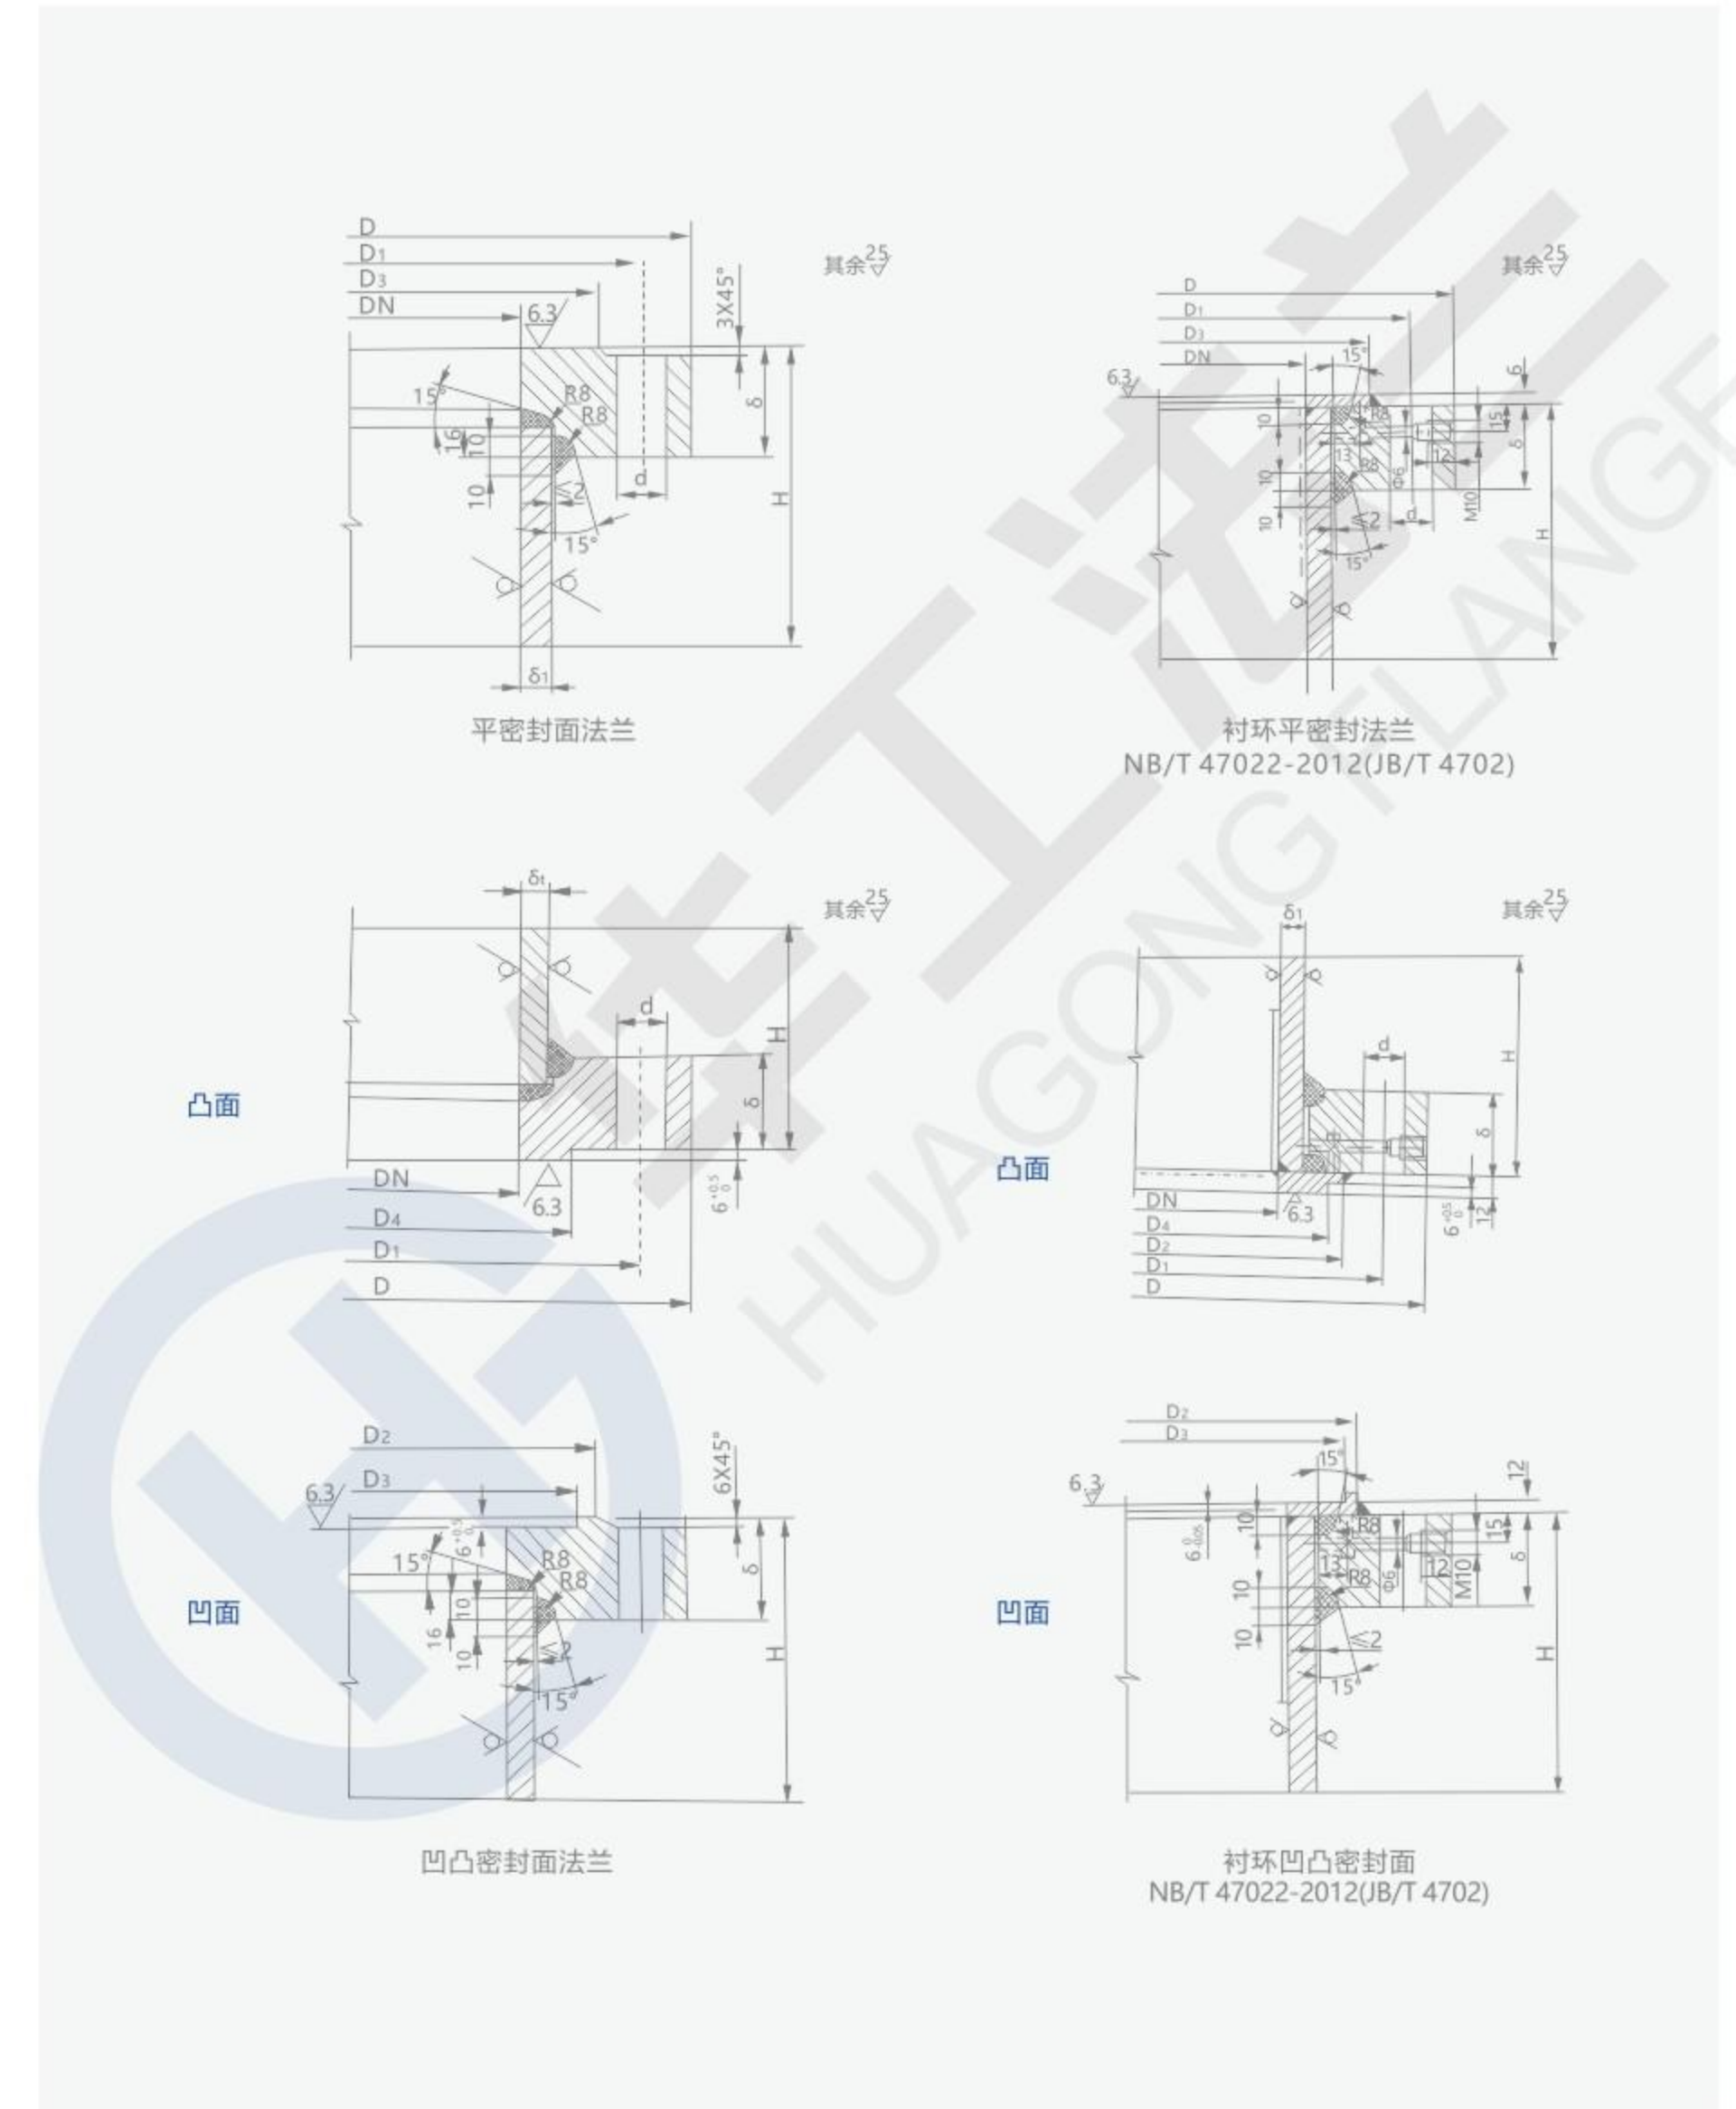

乙型平焊法兰尺寸(NB/T 47022-2012) Type b flat welded flange dimensions (mm)

公称直径 DN	法兰尺寸											螺柱	
	D	D1	D2	D3	D4	δ	H	δ <sub>1</sub>	a	a <sub>1</sub>	d	规格	数量
<b>PN=0.25MPa</b>													
2600	2760	2715	2676	2656	2653	96	345	16	21	18	27	M24	72
2800	2960	2915	2876	2856	2853	102	350	16	21	18	27	M24	80
3000	3160	3115	3076	3056	3053	104	355	16	21	18	27	M24	84
<b>PN=0.6MPa</b>													
1300	1460	1415	1376	1356	1353	70	270	16	21	18	27	M24	36
1400	1560	1515	1476	1456	1453	72	270	16	21	18	27	M24	40
1500	1660	1615	1576	1556	1553	74	270	16	21	18	27	M24	40
1600	1760	1715	1676	1656	1653	76	275	16	21	18	27	M24	44
1700	1860	1815	1776	1756	1753	78	280	16	21	18	27	M24	48/
1800	1960	1915	1876	1856	1853	80	280	16	21	18	27	M24	52
1900	2060	2015	1976	1956	1953	84	285	16	21	18	27	M24	56
2000	2160	2115	2076	2056	2053	87	285	16	21	18	27	M24	60
2200	2360	2315	2276	2256	2253	90	340	16	21	18	27	M24	64
2400	2560	2515	2476	2456	2453	92	340	16	21	18	27	M24	68
<b>PN=1.0MPa</b>													
1000	1140	1100	1065	1055	1052	62	260	12	17	14	23	M20	40
1100	1260	1215	1176	1156	1153	64	265	16	21	18	27	M24	32
1200	1360	1315	1276	1256	1253	66	265	16	21	18	27	M24	36
1300	1460	1415	1376	1356	1353	70	270	16	21	18	27	M24	40
1400	1560	1515	1476	1456	1453	74	270	16	21	18	27	M24	44
1500	1660	1615	1576	1556	1553	78	275	16	21	18	27	M24	48
1600	1760	1715	1676	1656	1653	82	280	16	21	18	27	M24	52
1700	1860	1815	1776	1756	1753	88	280	16	21	18	27	M24	56
1800	1960	1915	1876	1856	1853	94	290	16	21	18	27	M24	60
<b>PN=1.6MPa</b>													
700	860	815	776	766	763	46	200	16	21	18	27	M24	24
800	960	915	876	866	863	48	200	16	21	18	27	M24	24
900	1060	1015	976	966	963	56	205	16	21	18	27	M24	28
1000	1160	1115	1076	1066	1063	66	260	16	21	18	27	M24	32
1100	1260	1215	1176	1156	1153	76	270	16	21	18	27	M24	36
1200	1360	1315	1276	1256	1253	85	280	16	21	18	27	M24	40
1300	1460	1415	1376	1356	1353	94	290	16	21	18	27	M24	44
1400	1560	1515	1476	1456	1453	103	295	16	21	18	27	M24	52

乙型平焊法兰尺寸(NB/T 47022-2012) Type b flat welded flange dimensions (mm)

公称直径 DN	法兰尺寸											螺柱	
	D	D1	D2	D3	D4	δ	H	δ <sub>1</sub>	a	a <sub>1</sub>	d	规格	数量
<b>PN=2.5MPa</b>													
300	440	400	365	355	352	35	180	12	17	14	23	M20	16
350	490	450	415	405	402	37	185	12	17	14	23	M20	16
400	540	500	465	455	452	42	190	12	17	14	23	M20	20
450	590	550	515	505	502	43	190	12	17	14	23	M20	20
500	660	615	576	566	563	43	190	16	21	18	27	M24	20
550	710	665	626	616	613	45	195	16	21	18	27	M24	20
600	760	715	676	666	663	50	200	16	21	18	27	M24	24
650	810	765	726	716	713	60	205	16	21	18	27	M24	24
700	860	815	776	766	763	66	210	16	21	18	27	M24	28
800	960	915	876	866	863	77	220	16	21	18	27	M24	32
<b>PN=4.0MPa</b>													
300	460	415	376	366	363	42	190	16	21	18	27	M24	16
350	510	465	426	416	413	44	190	16	21	18	27	M24	16
400	560	515	476	466	463	50	200	16	21	18	27	M24	20
450	610	565	526	516	513	61	205	16	21	18	27	M24	20
500	660	615	576	566	563	68	210	16	21	18	27	M24	24
550	710	665	626	616	613	75	220	16	21	18	27	M24	28
600	760	715	676	666	663	81	225	16	21	18	27	M24	32

注：法兰短节与容器筒体连接部位的焊接坡口型式和尺寸由设计或制造单位决定。